

BOTTOM MOUNT REACH-IN FREEZERS

Bottom Mounted Condensing Unit



EVEREST
REFRIGERATION
www.EVERESTref.com

EB – Series

• EBF1 • EBWF1 • EBWFH2 • EBNF2 • EBF2 • EBF3



EBF1

EBWF1

EBWFH2



EBNF2

EBF2



EBF3

Cabinet Construction

Heavy duty stainless steel interior and exterior, with galvanized steel finished top, bottom and back wall of exterior. ABS evaporator drain cover. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door heater installed around inside cabinet frame to prevent moisture build-up.

Refrigeration System

- Bottom mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with multiple evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Environmentally friendly CFC free R-404A refrigerant
- Adjustable, time initiated defrost cycle of 3 to 12 hours with 350 watt defrost heater, both time and temperature terminated for fail-safe operation
- Automatic evaporator fan motor delay after defrost cycle
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan with wicking pads for self sufficient condensation removal
- Pressure relief ports for rapid cabinet re-entry
- Interior airflow backguard to ensure proper air circulation
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P, model EBF3 (230V/60Hz/1Ph) without plug

Doors

- Heavy duty stainless steel interior and exterior
- 2.5" thick high density foamed-in-place polyurethane insulation
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty recessed door handles
- Door locks
- Field reversible doors

Lighting

- Shielded incandescent interior lighting

Shelving

- Three epoxy coated wire shelves per section
- Stainless steel pilasters and shelf clips

Temperature Control

- Factory preset temperature, -4°F
- Temperature setting range from -10°F to 54°F
- Easy to read digital temperature display
- Easy to program push button temperature control
- Microchip digital control and monitoring system with a variety of functions to monitor and maintain optimum temperature

• Project / Customer _____
• Item No. _____
• Model No. _____



Warranty

5 Year — Compressor Warranty
3 Year — Parts & Labor Warranty
Applicable to units purchased after July 1, 2014.

Contact



201 W. Artesia Blvd, Compton, CA 90220
T. (310) 323-6586, (800) 444-6285
F. (310) 323-7524, (310) 761-1127

BOTTOM MOUNT REACH-IN FREEZERS

Bottom Mounted Condensing Unit



EVEREST
REFRIGERATION



www.EVERESTref.com

EB – Series


• EBF1 • EBWF1 • EBWFH2 • EBNF2 • EBF2 • EBF3

Dimensions


SIDE VIEW

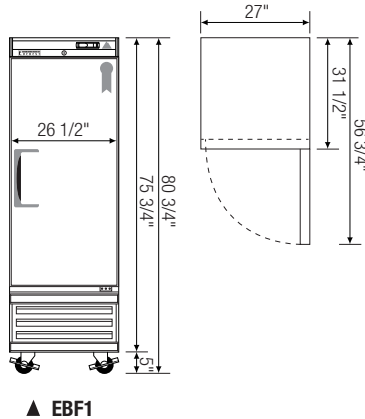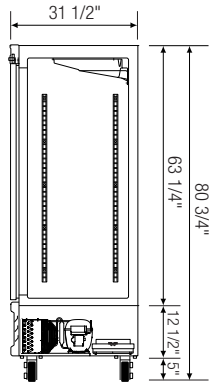



▲ EBF1

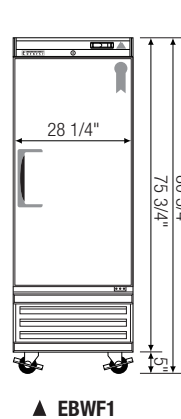



▲ EBWF1

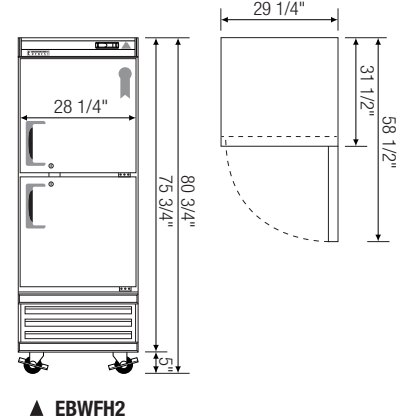



▲ EBWFH2



▲ EBNF2



▲ EBF2

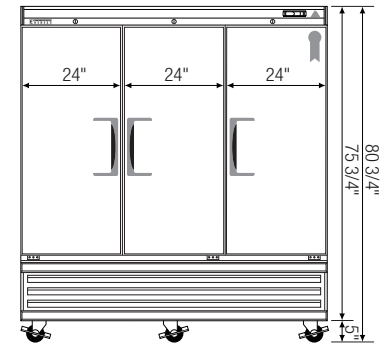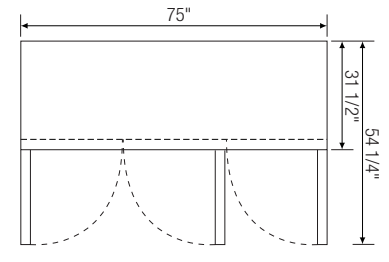

▲ EBF3

Model	Ref/ Frz/ Dual	# of Doors	Capacity (Cu.Ft.)	HP	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight (LBS)	Exterior Dimensions (Inches)			* Height does not include 5" for casters
										L	D	H *	
EBF1	Frz	1	20	1/2+	R-404A	3	115-60-1	7.59	307	27	31 1/2	75 3/4	Ref = Refrigerator Frz = Freezer Dual = Ref & Frz Combo H = Half Door
EBWF1	Frz	1	22	1/2+	R-404A	3	115-60-1	7.68	317	29 1/4	31 1/2	75 3/4	
EBWFH2	Frz	2(H)	22	1/2+	R-404A	3	115-60-1	7.68	322	29 1/4	31 1/2	75 3/4	
EBNF2	Frz	2	33	3/4	R-404A	6	115-60-1	8.20	408	39 1/2	31 1/2	75 3/4	
EBF2	Frz	2	50	3/4+	R-404A	6	115-60-1	11.14	533	54 1/4	31 1/2	75 3/4	
EBF3	Frz	3	70	1/2 + x 2	R-404A	9	230-60-1	7.84	670	75	31 1/2	75 3/4	

Disclaimer: Product dimensions are for general purposes and not absolute value. Slight variations may exist. If dimensions are critical, please contact Everest.