



Item # _____

C.S.I. Section 11420

VSRB SERIES

SELF CONTAINED REFRIGERATED BASE



**VSRB72 Refrigerated Base
shown with V6-36M Modular Range and
V-30-36M Modular French Hot Top Range**



SPECIFICATIONS:

Heavy duty self-contained refrigerated base, Vulcan-Hart Model No. VSRB_____ (for use in combination with Vulcan Signature Series modular top configurations only). Stainless steel front, top, sides and interior. Stainless steel top available in marine edge or flat top. Magnetic door gaskets. Top has 3" to 4" of insulation to prevent heat transfer. Sides, back and bottom have 2" of insulation. Drawer extended the full length for easy pan removal. Drawer module is removable for easy cleaning. Zero clearance required for sides and back. Exterior thermometer. 120 volt, single phase with 20 amp 6' cord and plug. Specify 6" legs or casters.

Exterior dimensions: _____"w x 34"d x 25"h on 6" adjustable legs.

UL listed.

- ☐ **VSRB48** 48" wide
- ☐ **VSRB60** 60" wide
- ☐ **VSRB72** 72" wide
- ☐ **VSRB84** 84" wide

STANDARD FEATURES


- Stainless steel front, top, sides and interior.
- Stainless steel top available in marine edge or flat top.
- 6" adjustable legs.
- Top has 3" to 4" of insulation to prevent heat transfer. Sides, back and bottom have 2" of insulation.
- Drawer extends the full length for easy pan removal.
- Lifetime coil warranty.
- Heavy duty magnetic door gaskets.
- Zero clearance required for side and back.
- Exterior thermometer.
- 120 volt, single phase with 20 amp 6' cord and plug.
- One year limited parts and labor warranty.

OPTIONS

- ☐ Stainless steel back.
- ☐ Curb mount available upon request. (Consult factory.)

AVAILABLE TOP CONFIGURATIONS (See individual spec sheets)

- | | |
|--|---|
| <input type="checkbox"/> Model V2-12M | 12" wide unit with two open burners. |
| <input type="checkbox"/> Model V1G-12M | 12" wide unit with griddle top. |
| <input type="checkbox"/> Model V2-18M | 18" wide unit with two open burners. |
| <input type="checkbox"/> Model V1G-18M | 18" wide unit with griddle top. |
| <input type="checkbox"/> Model V4-24M | 24" wide unit with four open burners. |
| <input type="checkbox"/> Model V1G-24M | 24" wide unit with griddle top. |
| <input type="checkbox"/> Model V4-36M | 36" wide unit with four open burners. |
| <input type="checkbox"/> Model V6-36M | 36" wide unit with six open burners. |
| <input type="checkbox"/> Model V3G-36M | 36" wide unit with griddle top. |
| <input type="checkbox"/> Model V30-36M | 36" wide unit with one french hot top burner. |
| <input type="checkbox"/> Model V2H-36M | 36" wide unit with two hot top burners. |

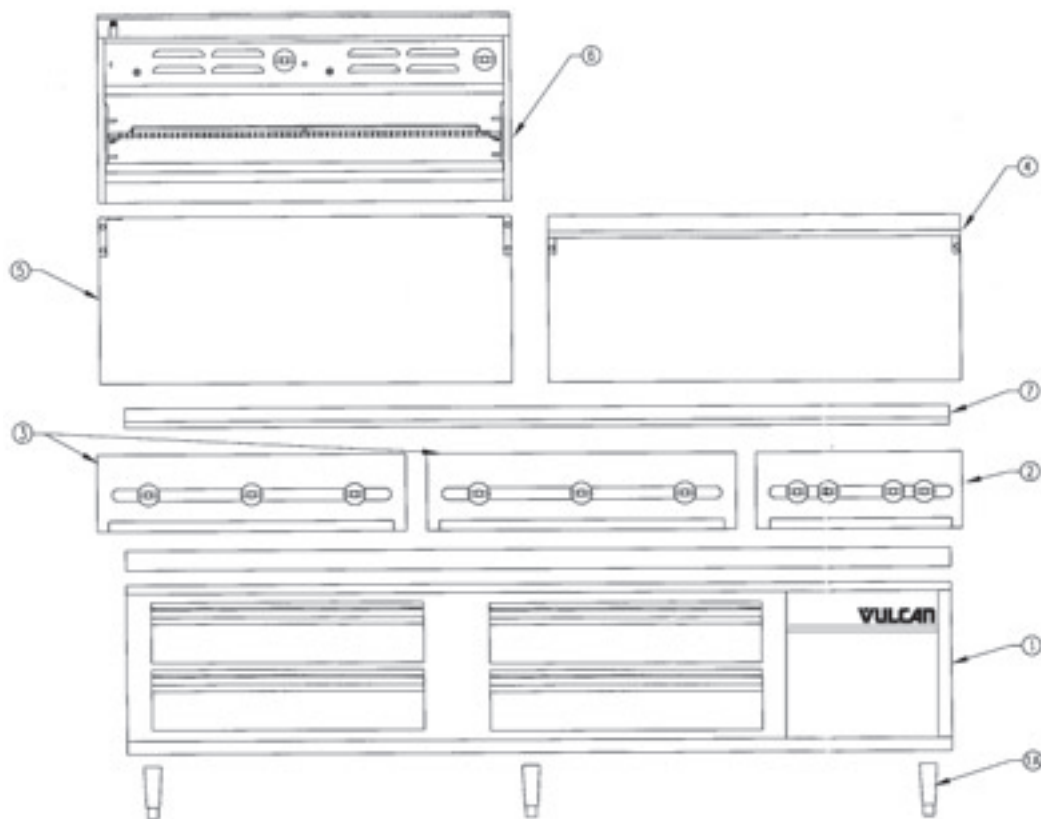
COMBINATION SPECIFICATION:

1. Select refrigerator base of required size. (ex: 96" remote refrigerator unit)
- 1A. Select adjustable 6" legs or 5" casters.
Select desired modular devices:
2. Example: 24" open burner device and
3. Example: 2 x 36" modular device
Select riser options:
4. Example: 48" high shelf
5. Example: 48" reinforced riser
6. 48" cheesemelter (device) to be mounted on item (5).
7. Select front top ledge (example: 96" common front top ledge)

IMPORTANT:

- 1. For use in combination with Vulcan Signature Series modular top configurations only.
- 2. Modular top clearances:


	Combustible	Non-Combustible
Rear	2"	0"
Sides	20"	2"
- 3. This appliance is manufactured for commercial installation only and is not intended for home use.

SERVICE CONNECTIONS:




- Drain: Open end drain, located in rear
- Electric: 120 volt, single phase, 20 amp maximum


**Side View
VSRB SERIES**

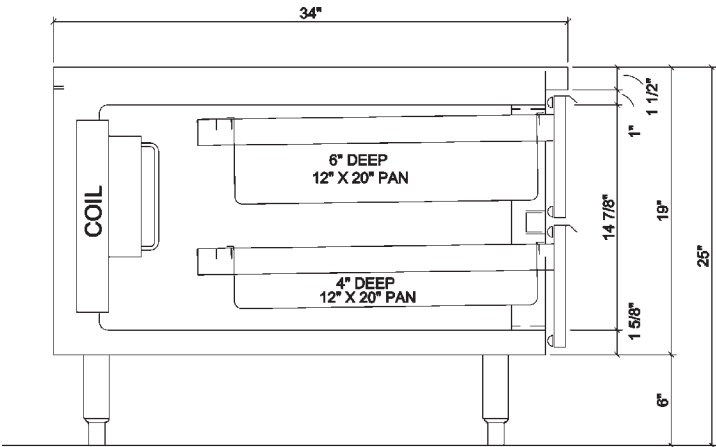

**Front View
VSRB48**

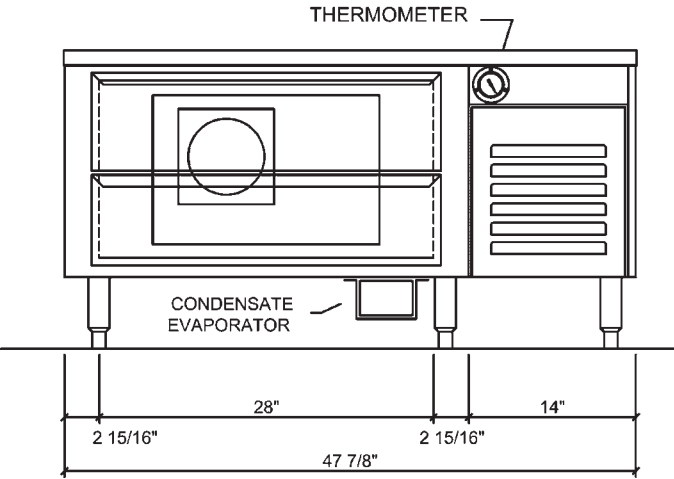



**Front View
VSRB60**

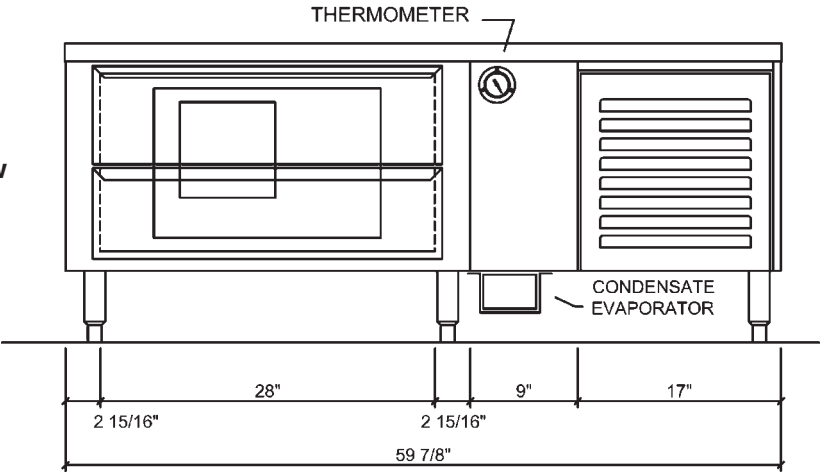



VSRB SERIES

SELF CONTAINED REFRIGERATED BASE

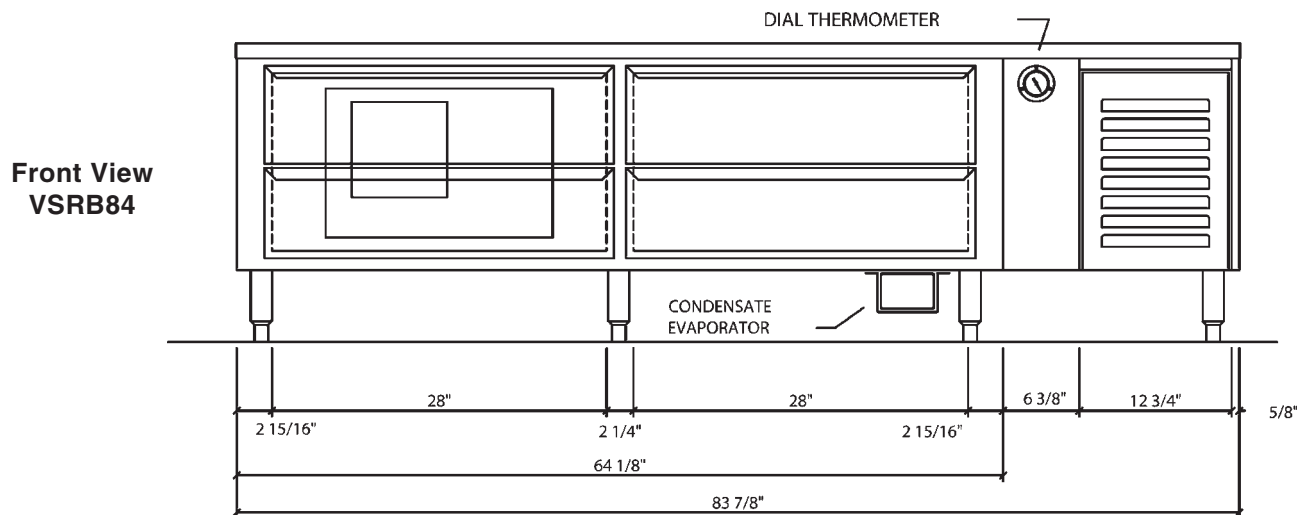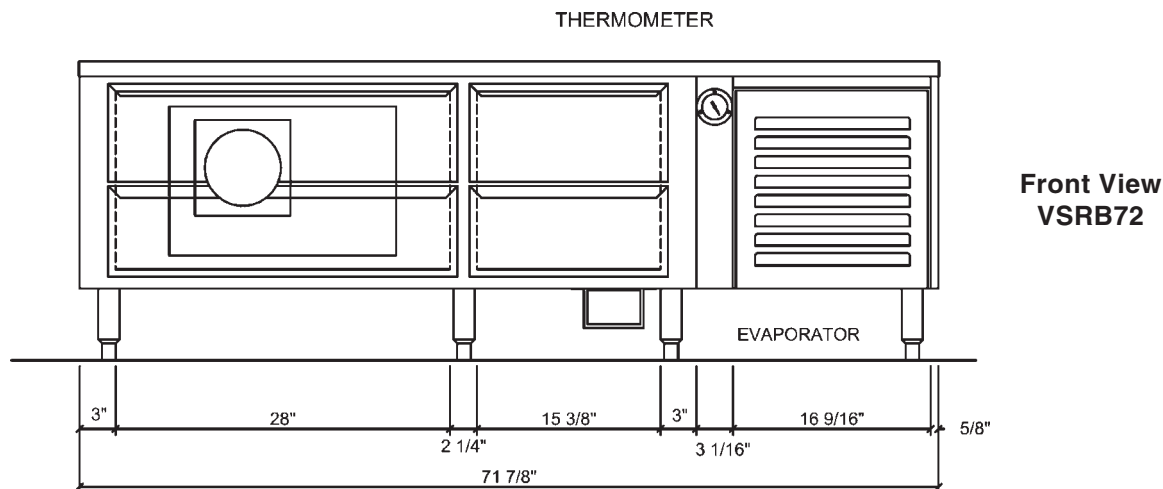

REFRIGERATED BASE SPECIFICATIONS:

Model	Electrical			Refrigeration	Dimensions			No. of Drawers	Pan Capacity	Pan Capacity	Approx. Ship Wgt.	
	H.P.	Voltage	Amps		Width	Depth	Height		4" x 12" x 20"	6" x 12" x 20"	Lbs.	Kg.
VSRB48	1/6	120/60/1	4.7	R134a	48"	34"	25"	2	2	2	410	186
VSRB60	1/6	120/60/1	4.7	R134a	60"	34"	25"	2	2	2	440	200
VSRB72	1/3	120/60/1	9.2	R134a	72"	34"	25"	4	3	3	460	209
VSRB84	1/3	120/60/1	11.3	R134a	84"	34"	25"	4	4	4	490	222

NOTE: In line with its policy to continually improve its products, Vulcan-Hart Company reserves the right to change materials and specifications without notice.

VULCAN-HART COMPANY, P.O. BOX 696, LOUISVILLE, KY 40201, TEL. 1-800-814-2028
502-778-2791 QUOTE & ORDER FAX: 1-800-444-0602