# 24" DEEP BACK BAR COOLER

### EBB – Series Model : EBB90-24





Operating temperature range is 32°F ~ 42°F





#### **Cabinet Construction**

Heavy duty stainless steel countertop, with textured and laminated black vinyl exterior. Galvanized steel interior wall, and high quality stainless steel floor. 1 3/4" thick high density foamed-in-place polyurethane insulation. Built-in caster thread receptacles.

#### **Refrigeration System**

- · Side mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with oversized evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- $\cdot$  Removable side panel and slide-out condensing unit for convenient repair and maintenance
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- · Copper tube and aluminum fin evaporator with anti-corrosive coating
- · Energy efficient condensate drain pan assembly heated by high side copper tube
- · Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

#### Doors

- · Textured and laminated black exterior with galvanized steel interior
- $\cdot$  1 3/4" thick high density foamed-in-place polyurethane insulation
- · One piece snap-in magnetic door gaskets for easy replacement
- $\cdot\,$  Heavy duty recessed door handles for a flat surface
- Door locks

### Lighting

 Shielded vertical LED interior lighting with on/off switch for energy saving, less heat generation and enhanced illumination (available from 2015 models)

#### Shelving

- · Two epoxy coated wire shelves per section
- · Stainless steel pilasters and shelf clips

#### **Temperature Control**

- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- · Easy to set analog thermostat

#### Option

· 2 1/2" and 4" diameter casters (3 1/2" and 5" overall height)

Model	# of	Capacity	HP	Refrigerant	# of	Capacity 20 oz.	Power	Amps	Crated Weight	Exterior Dimensions		
	Doors	(Cu. Ft.)		C .	Shelves	<b>Cans / Bottles</b>	(V-Hz-Ph)	•		L	D	Н
EBB90-24	3	27.76	1/3	R-134A	6	980 / 609	115-60-1	4.50	381 lbs (172.8 kg)	89 1/4'' (2268 mm)	24 1/2'' (623 mm)	37 1/4'' (946 mm)

Specifications subject to change without notice.

Product dimensions are for general purposes and not absolute value. Product capacity(**)** is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.


# **24" DEEP BACK BAR COOLER**


## EBB – Series Model : EBB90-24




Net capacity	cu. ft.	27.96 (791.7 cu l)			
	Length Overall in.	89 1/4" (2268)			
Exterior (mm)	Depth Overall in. $^{*}$	24 1/2" (623)			
()	Height Overall in.	37 1/4" (946)			
	Length Overall in.	74 1/2" (1893)			
Interior (mm)	Depth Overall in.	20 3/4" (527)			
()	Height Overall in.	31 1/4" (795)			
Crated Weig	ht	381 lbs (172 kg)			
# of Doors		3			
# of Shelves		6			
Capacity 20	oz. (Cans / Bottles)	980 / 609			
Shelf Size Le (mm)	ength x Depth in.	25" x 18 1/2" (635 x 470) 26 15/16" x 18 1/2 (684 x 470) 23" x 18 1/2" (584 x 470)			
ELECTRIC	al data				
Voltage (V-H	z-Ph)	115-60-1			
Full load am	peres	4.50			
Feed wires v	vith Ground	3			
Cord Length	ft.	9			
REFRIGE	RATION DATA				
Refrigerant		R-134A			
Compressor	H.P.	1/3 HP			
BTU/HR <sup>a</sup> (K		2555 (644)			

### Dimensions inches (mm)

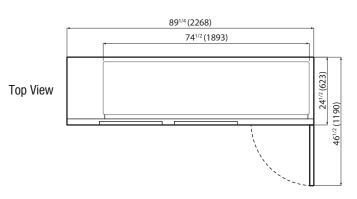







Specifications subject to change without notice. \* : Exterior depth dimension does not include 1 1/2" for door handle.

a : Based on evaporating temperature of 23°F(-5°C) & Condensing temperature of 131°F(55°C).



Equipped with one NEMA 5-15P plug.

201 W. Artesia Blvd., Compton, CA 90220 T. (310) 323–6586, (800) 444–6285 F. (310) 323-7524, (310) 761-1127