

24" DEEP DIRECT DRAW KEG REFRIGERATOR

EBD – Series

Model : EBD3-24



Operating temperature range is 32°F ~ 42°F



Cabinet Construction

Heavy duty stainless steel countertop with textured and laminated black vinyl exterior. Galvanized steel interior wall, and high quality stainless steel floor. 1 3/4" thick high density foamed-in-place polyurethane insulation. Built-in caster thread receptacles.

Refrigeration System

- Side mounted condensing unit
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with oversized evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Removable side panel and slide-out condensing unit for convenient repair and maintenance
- Environmentally friendly CFC free R-134A refrigerant
- Air defrost controlled by electrical timer
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Energy efficient condensate drain pan assembly heated by high side copper tube
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Doors

- Textured and laminated black exterior with galvanized steel interior
- 1 3/4" thick high density foamed-in-place polyurethane insulation
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty recessed door handles for a flat surface
- Door locks

Draft Arms

- NSF approved 3" diameter insulated stainless steel draft arm with air distributor
- One single faucet and One dual faucet draft arms

Lighting

- Shielded incandescent interior lighting with on/off switch

Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 32°F to 42°F
- Easy to set analog thermostat

Options

- 2 1/2" and 4" diameter casters (3 1/2" and 5" overall height)
- Dual faucet towers

Model	# of Doors	# of 1/2 Barrels	Capacity (Cu. Ft.)	HP	Refrigerant	Power (V-Hz-Ph)	Amps	Crated Weight	Exterior Dimensions		
									L	D	H*
EBD3-24	2	(3) 1/2	20.41	1/4+	R-134A	115-60-1	4.50	297lbs (134.7kg)	68" (1727 mm)	24 1/2" (623 mm)	37 1/8" (944 mm)

Specifications subject to change without notice.


Product dimensions are for general purposes and not absolute value. Product capacity(▶) is calculated based on standard industry figures. Slight variations may exist. If dimensions and capacity are critical, please contact Everest Refrigeration.

24" DEEP DIRECT DRAW KEG REFRIGERATOR

EBD – Series

Model : EBD3-24




DIMENSIONAL DATA		
Net capacity cu. ft.		20.41 (577.9 cu l)
Exterior (mm)	Length Overall in.	68" (1727)
	Depth Overall in.	24 1/2" (623)
	Height Overall in.*	37 1/8" (944)
Crated Weight		297lbs (134.7kg)
# of Doors		2
# of 1/2 Barrels		(3) 1/2
ELECTRICAL DATA		
Voltage (V-Hz-Ph)		115-60-1
Full load amperes		4.50
Feed wires with Ground		3
Cord Length ft.		9
REFRIGERATION DATA		
Refrigerant		R-134A
Compressor H.P.		1/4+ HP
BTU/HR ^a (Kcal/h)		2075 (523)
 Equipped with one NEMA 5-15P plug.		


Specifications subject to change without notice.

^a : Based on evaporating temperature of 23°F(-5°C) & Condensing temperature of 131°F(55°C).


Dimensions inches (mm)

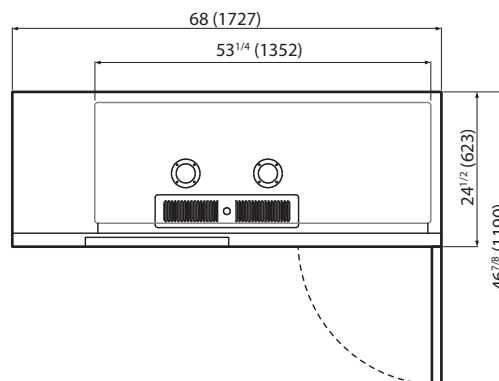

Top View

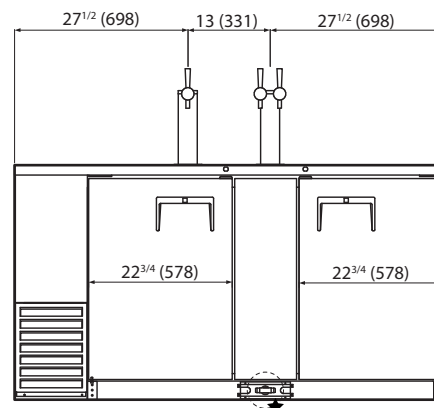

Front View

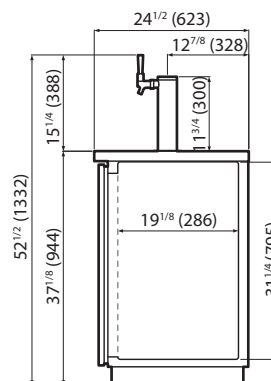

Side View

